


Server Fan


Controlled Airflow for Continuous Operation

40 X 28

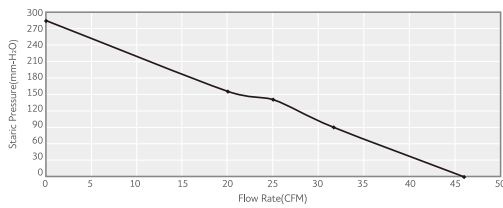


Model	Bearing	Rated Voltage (VDC)	Speed (RPM)	Max. Airflow (CFM)	Max. Static Pressure (mm-H ₂ O)	Current (A)	Noise Level dB(A)
DFB402812E-E	2B	12	27,000	31.5	100.3	1.2	63
DFB402812E-H	2B	12	45,000	46	283.3	3.65	73.5

40 X 56

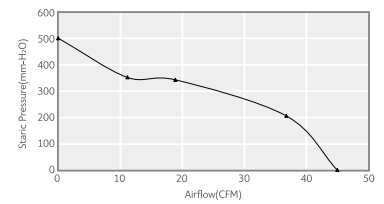


Model	Bearing	Rated Voltage (VDC)	Speed (RPM)	Max. Airflow (CFM)	Max. Static Pressure (mm-H ₂ O)	Current (A)	Noise Level dB(A)
DFB405612H	2B	12	45,000/ 43,500	44.5	498.2	6.0	77

60 X 38




Model	Bearing	Rated Voltage (VDC)	Speed (RPM)	Max. Airflow (CFM)	Max. Static Pressure (mm-H ₂ O)	Current (A)	Noise Level dB(A)
DFB603812E	2B	12	7,500	45.5	22.9	0.72	55.0

60 X 56

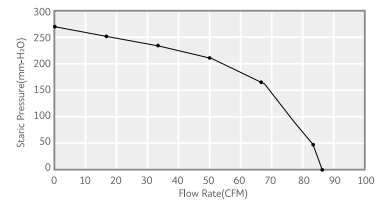


Model	Bearing	Rated Voltage (VDC)	Speed (RPM)	Max. Airflow (CFM)	Max. Static Pressure (mm-H ₂ O)	Current (A)	Noise Level dB(A)
DFB605612H	2B	12	24,300/ 22,700	90	259	5.6	83.5

80 X 32



Model	Bearing	Rated Voltage (VDC)	Speed (RPM)	Max. Airflow (CFM)	Max. Static Pressure (mm-H ₂ O)	Current (A)	Noise Level dB(A)
DFB803212U	2B	12	11,000	98.6	47	12	61.9
DFB803224U	2B	24	11,000	98.6	47	0.7	61.9

80 X 38



Model	Bearing	Rated Voltage (VDC)	Speed (RPM)	Max. Airflow (CFM)	Max. Static Pressure (mm-H ₂ O)	Current (A)	Noise Level dB(A)
DFB803812U	2B	12	17,000	135	145	4.8	69.5
DFB803824U	2B	24	17,000	135	145	2.3	69.5
DFB803848U	2B	48	17,000	135	145	1.2	69.5



Website



Digital Brochure

Server Fan




Controlled Airflow for Continuous Operation

80 X 56




Model	Bearing	Rated Voltage (VDC)	Speed (RPM)	Max. Airflow (CFM)	Max. Static Pressure (mm-H ₂ O)	Current (A)	Noise Level dB(A)
DFB805612H	2B	12	18,000/16,000	137.5	269.6	5.28	83.2
DFB805648H	2B	48	18,000/16,000	137.5	269.6	1.32	83.2

80 X 80




Model	Bearing	Rated Voltage (VDC)	Speed (RPM)	Max. Airflow (CFM)	Max. Static Pressure (mm-H ₂ O)	Current (A)	Noise Level dB(A)
DFB808012H	2B	12	20,000/18,000	205	267	13.6	92
DFB808048H	2B	48	20,000/18,000	205	267	3.4	92

92 X 38



Model	Bearing	Rated Voltage (VDC)	Speed (RPM)	Max. Airflow (CFM)	Max. Static Pressure (mm-H ₂ O)	Current (A)	Noise Level dB(A)
DFB923812U	2B	12	12,500	184.5	79	4.4	67.5
DFB923824U	2B	24	13,500	192.9	103.7	2.2	68.5
DFB923848U	2B	48	13,500	192.9	103.7	1.1	68.5

120 X 38



Model	Bearing	Rated Voltage (VDC)	Speed (RPM)	Max. Airflow (CFM)	Max. Static Pressure (mm-H ₂ O)	Current (A)	Noise Level dB(A)
DFB123812H-E	2B	12	6,000	236.4	48.1	3.5	64.9
DFB123824E-E	2B	24	7,000	275.9	60.4	2.7	69.2
DFB123848E-E	2B	48	7,000	275.9	60.4	1.3	69.2



Website



Digital Brochure